

Recessed DP IP54 T5

cryselco.co.uk/dp



An aluminium framed seam welded recessed fitting suitable for exposed T-grid ceilings. The frame contains a tough polycarbonate prismatic Tp (a) panel that is retained by 4 wishbone springs against a gasket.

Tested to IP 54 from above and below with removable internal gear tray. A supplied tool is required to remove the frame which enables easy re-lamping from below.


Emergency - Three hour maintained integral emergency available that retains IP 54 rating.

Available additional options to special order:


- * IP65 Version
- * Plasterboard versions
- * TC-L 40w & 55w versions
- * T8 lamp versions (large volumes)
- * Other sizes
- * Opal panels
- * Low Glare Louvre behind clear polycarbonate panel



Recessed IP54 Fitting with Sealed Prismatic Diffuser				
Cat. No.	Lamps Req	A	B	C
DP66/314/PRISM	3 x 14w T5	595	595	92
DP66/414/PRISM	4 x 14w T5	595	595	92
DP66/324/PRISM	3 x 24w T5	595	595	92
DP66/424/PRISM	4 x 24w T5	595	595	92
DP312/228/PRISM	2 x 28w T5	295	1195	92
DP312/254/PRISM	2 x 54w T5	295	1195	92

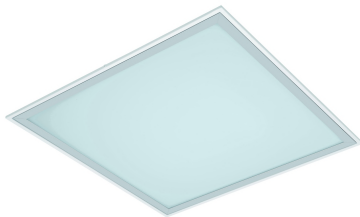


Recessed IP54 Fitting with Sealed Opal Diffuser				
Cat. No.	Lamps Req	A	B	C
DP66/314/OPAL	3 x 14w T5	595	595	92
DP66/414/OPAL	4 x 14w T5	595	595	92
DP66/324/OPAL	3 x 24w T5	595	595	92
DP66/424/OPAL	4 x 24w T5	595	595	92
DP312/228/OPAL	2 x 28w T5	295	1195	92
DP312/254/OPAL	2 x 54w T5	295	1195	92

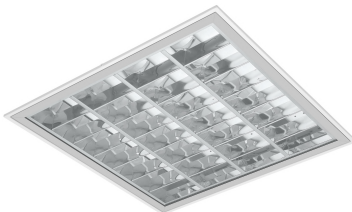

Recessed IP54 Fitting with Sealed Clear Cover and Louvre				
Cat. No.	Lamps Req	A	B	C
DP66/314/COVER+LVR	3 x 14w T5	595	595	92
DP66/414/COVER+LVR	4 x 14w T5	595	595	92
DP66/324/COVER+LVR	3 x 24w T5	595	595	92
DP66/424/COVER+LVR	4 x 24w T5	595	595	92
DP312/228/COVER+LVR	2 x 28w T5	295	1195	92
DP312/254/COVER+LVR	2 x 54w T5	295	1195	92

Control Gear options
 Digital SwitchDIM dimming,
 Analogue 1 to 10 volt
 dimming, DSI and DALI
 dimming, Emergency
 Conversion



Surface matching range also available upon request