


DP IP54 Recessed T5

DP IP54 Box

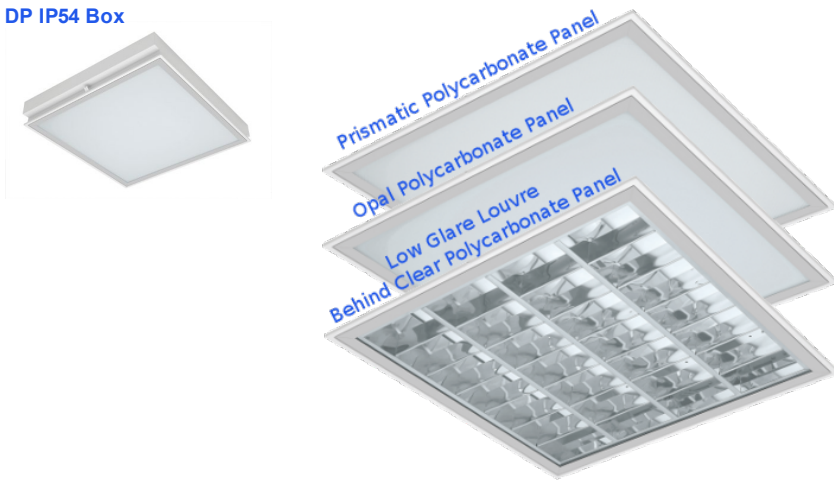

An aluminium framed seam welded recessed fitting suitable for exposed T-grid ceilings. The frame contains a tough polycarbonate prismatic Tp (a) panel that is retained by 4 wishbone springs against a gasket. Tested to IP 54 from above and below with removable internal gear tray. A supplied tool is required to remove the frame which enables easy re-lamping from below.

Emergency - Three hour maintained integral emergency available that retains IP 54 rating. Details [here](#).

Available additional options to special order:

- Plasterboard versions
- TC-L 40w & 55w versions
- T8 lamp versions (large volumes)
- Other sizes
- Opal panels
- Low Glare Louvre behind clear polycarbonate panel

Ordering details and dimensions (mm)

<u>Catalogue number</u>	<u>Lamps</u>	<u>Width</u>	<u>Length</u>	<u>Height</u>
DP66/314/+	3 x 14w T5	595	595	92
DP66/414/+	4 x 14w T5	595	595	92
DP66/324/+	3 x 24w T5	595	595	92
DP66/424/+	4 x 24w T5	595	595	92
DP312/228/+	2 x 28w T5	295	1195	92
DP312/254/+	2 x 54w T5	295	1195	92
+ = Control Gear options (Mouse over for legend)				
HF HF DIG DIM HF 1-10v DIM DSI and DALI dimming E				