

Surface Meteor T8 and T5

cryselco.co.uk/mtr



Meteor is available with an integral HF (Microwave) sensor with a detection range of up to 10 metres. This allows the luminaire to switch on automatically when it senses movement from people or vehicles and can provide substantial energy savings in a wide range of applications. These are only available for T5 lamps - please enquire.

Non corrosive IP65 surface fittings. Diffuser sealed into poured non removable gasket and secured by quick release poly-carbonate clips. Steel geartray finished in white and secured by release catches. There are suspension slots on the geartray for maintenance. Body moulded in light grey polycarbonate. End seals supplied. Metal ceiling fixings give "F" mark classification.


Please enquire for low temperature operation.

Please refer all 80w enquiries.

Extras - Stainless steel vandal resistant diffuser clips and suspension cables available.

Diffusers - Standard in moulded clear polycarbonate.

Emergency - Three hour maintained integral emergency conversion available. In order to maintain the IP65 rating of the luminaire, all maintained emergency conversions should be integral within the body. If this is not possible due to physical size we will discuss the possibility of a remote box or different gear (e.g. 2 and 4ft twins).

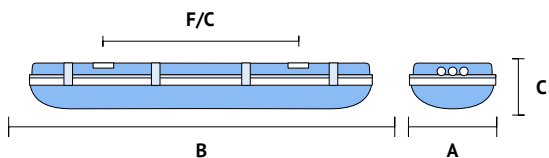

| Meteor T8 (all polycarbonate) | | | | | |
|-------------------------------|-------------|-----|------|-----|------|
| Cat. No. | Lamps Req | A | B | C | F/C |
| MTR/1218 | 1 x 2ft 18w | 100 | 660 | 101 | 490 |
| MTR/1436 | 1 x 4ft 36w | 100 | 1270 | 101 | 918 |
| MTR/1558 | 1 x 5ft 58w | 100 | 1570 | 101 | 1220 |
| MTR/1670 | 1 x 6ft 70w | 100 | 1839 | 101 | 1380 |
| MTR/2218 | 2 x 2ft 18w | 160 | 660 | 101 | 490 |
| MTR/2436 | 2 x 4ft 36w | 160 | 1270 | 101 | 918 |
| MTR/2558 | 2 x 5ft 58w | 160 | 1570 | 101 | 1220 |
| MTR/2670 | 2 x 6ft 70w | 160 | 1570 | 101 | 1380 |

| Meteor T5 (all polycarbonate) | | | | | |
|-------------------------------|------------|-----|------|-----|------|
| Cat. No. | Lamps Req | A | B | C | F/C |
| MTR/128/T5 | 1 x 28w T5 | 100 | 660 | 101 | 918 |
| MTR/154/T5 | 1 x 54w T5 | 100 | 1270 | 101 | 918 |
| MTR/135/T5 | 1 x 35w T5 | 100 | 1570 | 101 | 1220 |
| MTR/149/T5 | 1 x 49w T5 | 100 | 1570 | 101 | 1220 |
| MTR/228/T5 | 2 x 28w T5 | 160 | 660 | 101 | 918 |
| MTR/254/T5 | 2 x 54w T5 | 160 | 1270 | 101 | 918 |
| MTR/235/T5 | 2 x 35w T5 | 160 | 1570 | 101 | 1220 |
| MTR/249/T5 | 2 x 49w T5 | 160 | 1570 | 101 | 1220 |

| Stainless Steel Clips | |
|-----------------------|--|
| Cat. No. | Description |
| MTR/SSC | Stainless Steel Vandal Resistant Clips (6 clips for 2ft, 8 for 4ft, 10 for 5ft, 12 for 6ft) |

Control Gear options
Digital SwitchDIM dimming, Analogue 1 to 10 volt dimming, DSI and DALI, Emergency Conversion

Other Options
Stainless Steel Vandal Resistant Clips (6 clips for 2ft, 8 for 4ft, 10 for 5ft, 12 for 6ft).
2-Wire Suspension Kit.